




WHISPER DRYING SYSTEM

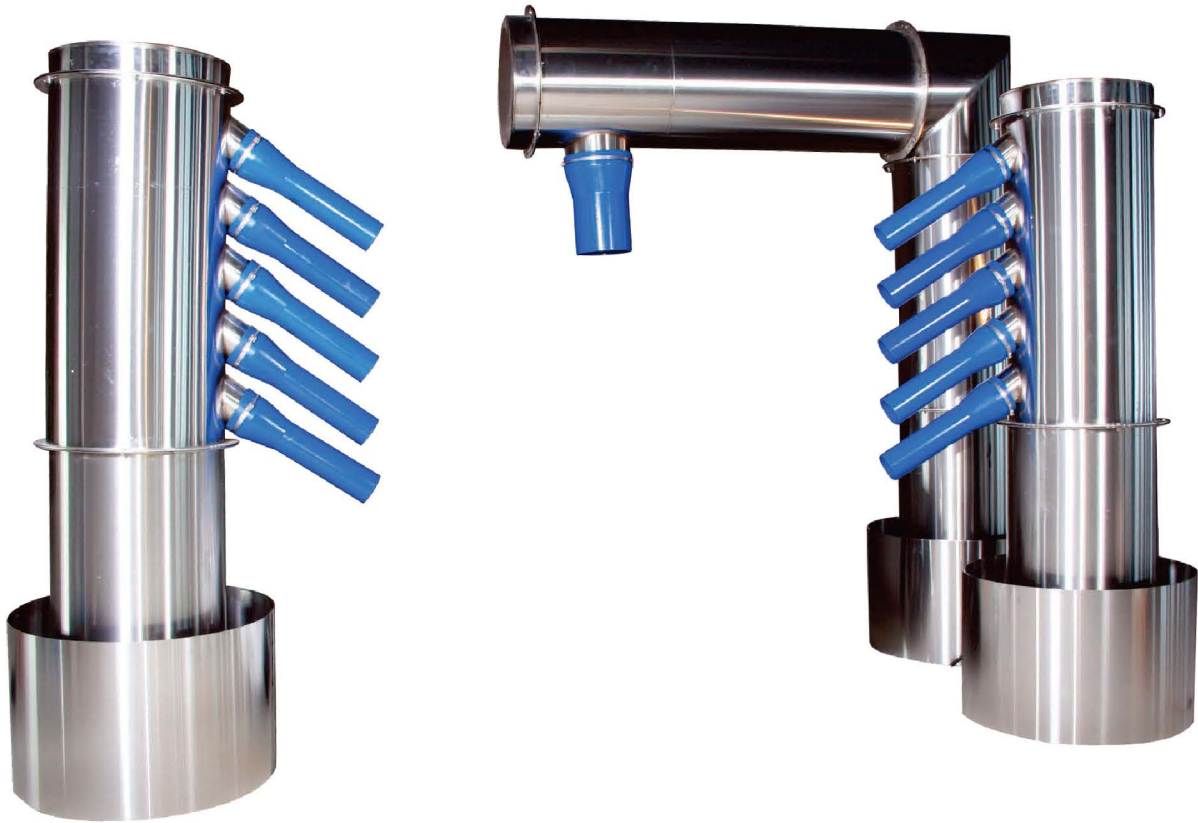

“SIMPLY SMART DRYING SYSTEM”

- ✓ Constructed from 304 Surgical Grade Stainless Steel.
- ✓ Whisper Sound Package Provides Reduced dBA and Sound Frequency Control.
- ✓ Powerful 9600 CFM's Per 10 HP Motor.
- ✓ Axial Fan has Lifetime Warranty.

CALL US ANYTIME



(+1) 815 477 4911

EMAIL US



Info@internationaldrying.com

FIND US



internationaldrying.com

VISIT US




International Drying Corporation
2510 IL RTE 176, Suite G
Prairie Grove, IL 60012

Airflow Comparisons: Axial vs Centrifugal Fans

# of Motors	10HP Centrifugal Fan Total Air Flow (CFM)	15HP Centrifugal Fan Total Air Flow (CFM)	10HP Axial Fan Total Air Flow (CFM)	10HP Total Current Used (AMPS) @ 208 VAC	15HP Total Current Used (AMPS) @ 208 VAC
3	13500	16500	28000	74.7	110.4
4	18000	22000	38400	99.6	147.2
5	22500	27500	48000	124.5	184
6	27000	33000	57600	149.4	257.6
7	31500	38500	67200	174.3	294.4
8	36000	44000	76800	199.2	199.2
9	40500	49500	86400	224.1	331.2
10	45000	55000	96000	249	368

Motor Specifications	Phase	Voltage	Amperage	Efficiency @ 100% Load
10HP	3	208/230-460	24.9 / 23.6 / 11.8	91
15HP	3	208/230-460	36.8 / 34 / 17	91

*CFM = Cubic Feet Per Minute Air Flow

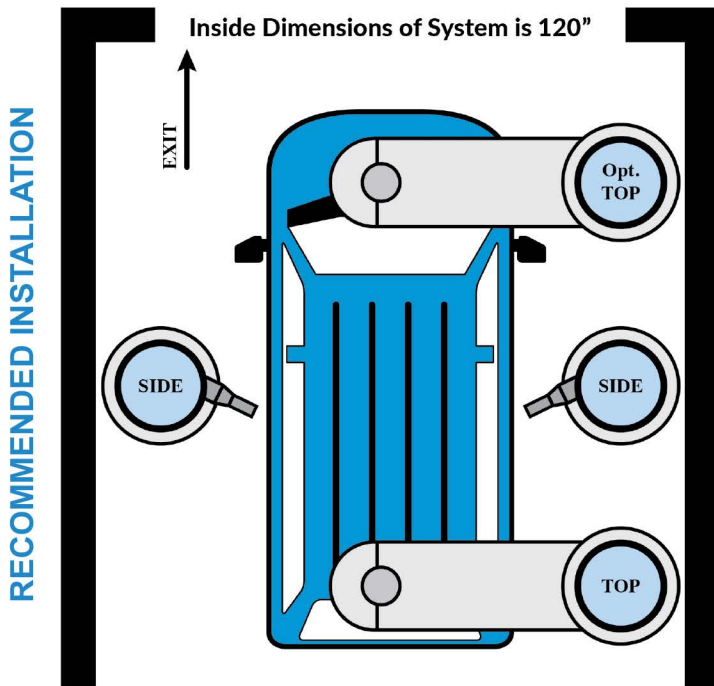

- ✓ The Whisper System is designed to last a lifetime! No Maintenance required. Easy installation and a lifetime of worry-free drying.
- ✓ Whisper Package reduces sound levels and lowers sound frequency!



Cast Aluminum Axial Fan



SPECIFICATIONS

10 & 15 HP Motors:
3 Phase, TEFC, 1.3 SF
230-460v, useable on 208v

14' Bay Width
10'5" Ceiling Height
96" Standard Clearance

15 HP: 32 Amps 10 HP: 27 Amps
Molded Aluminum Impellers

Stainless Steel Motor Housings
Ducts - Stainless Steel

Closed cell foam nozzles available in red, blue, black and green.
All other colors available upon request.

Slotted flanges for adjustability of air outlet and air intake direction.